

两段力定位铰链  
Two section clip-on hinge


产品图示



产品描述


- 开启角度: 105度
- 铰杯厚度: 11.5毫米
- 铰杯直径: 35毫米
- 面板(K)尺寸: 3-7毫米
- 门板可用厚度: 14-22毫米
- Opening angle: 105°
- Thickness of hinge cup: 11.5mm
- Diameter of hinge cup: 35mm
- Panel (K) Size: 3-7mm
- Available door thickness: 14-22mm

φ35mm铰杯种类 (Hing cup types)

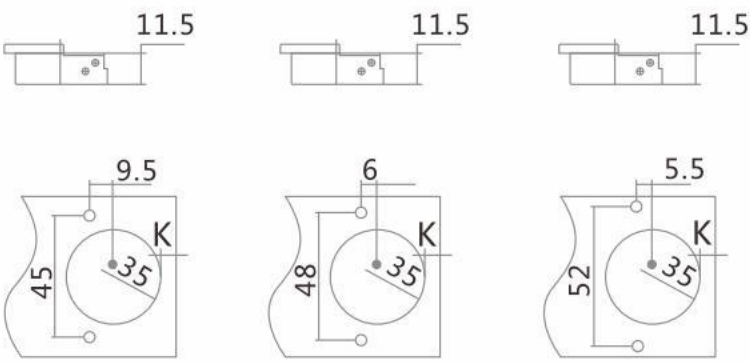


利用以下公式决定铰链臂的种类，解决问题时，必需有门身钻孔“K”及安装板高度“H”的数值。  
Use the following formula to determine the type of hinges, solving problems, it is necessary a door body drillHole "K" and mounting plate height value of "H".

φ35mm铰杯可配螺丝种类 (Options of screws and dowels)

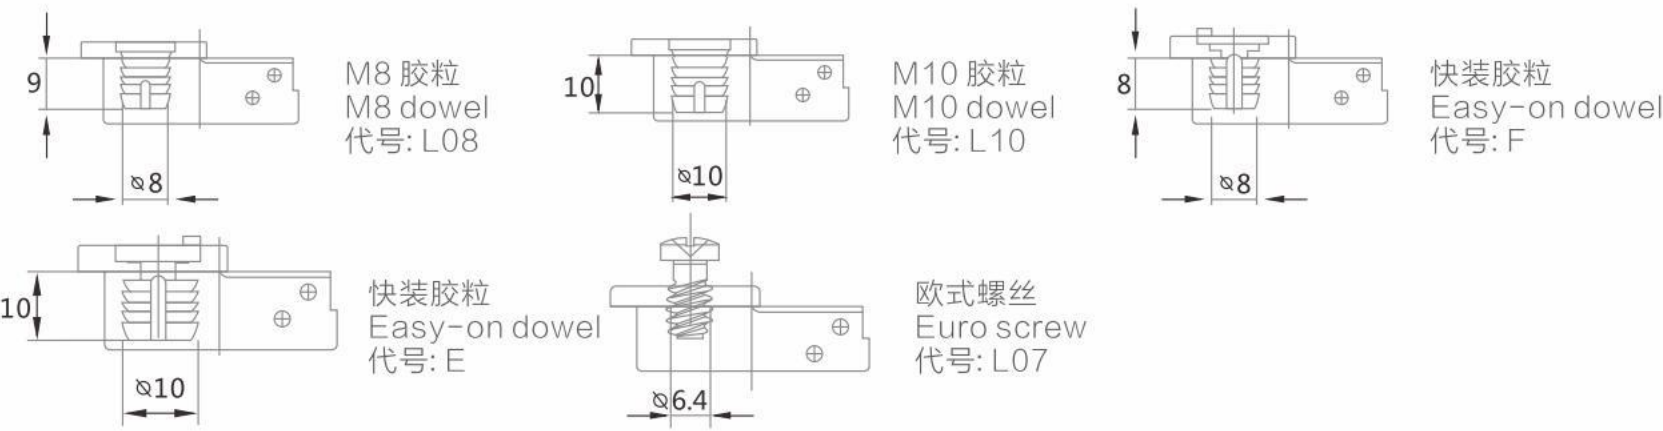

直臂 订货号 (Item number) : 0241

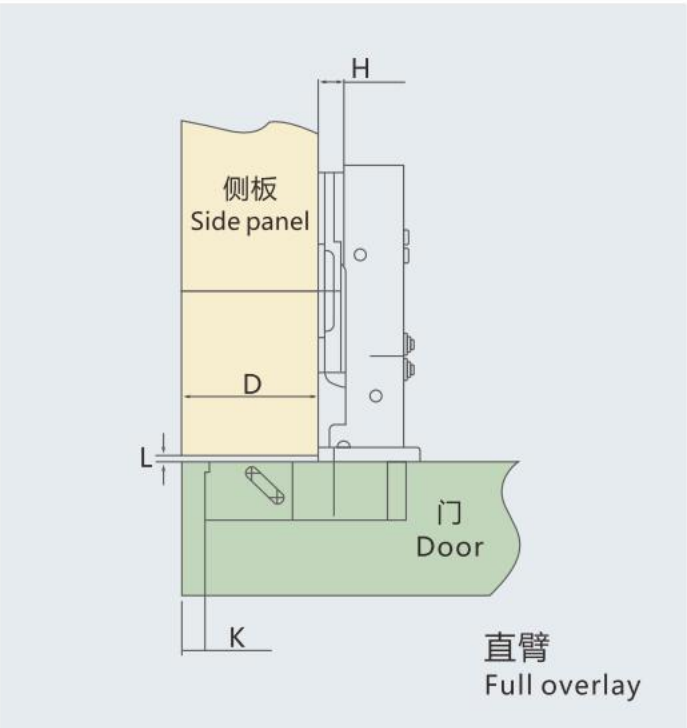


$H = 14 + K - D$

| D \ K | 3  | 4  | 5  | 6  | 7  |
|-------|----|----|----|----|----|
| -2    | 19 | 20 | 21 | 22 | 23 |
| 0     | 17 | 18 | 19 | 20 | 21 |
| 2     | 15 | 16 | 17 | 18 | 19 |



中弯 订货号 (Item number) : 0242

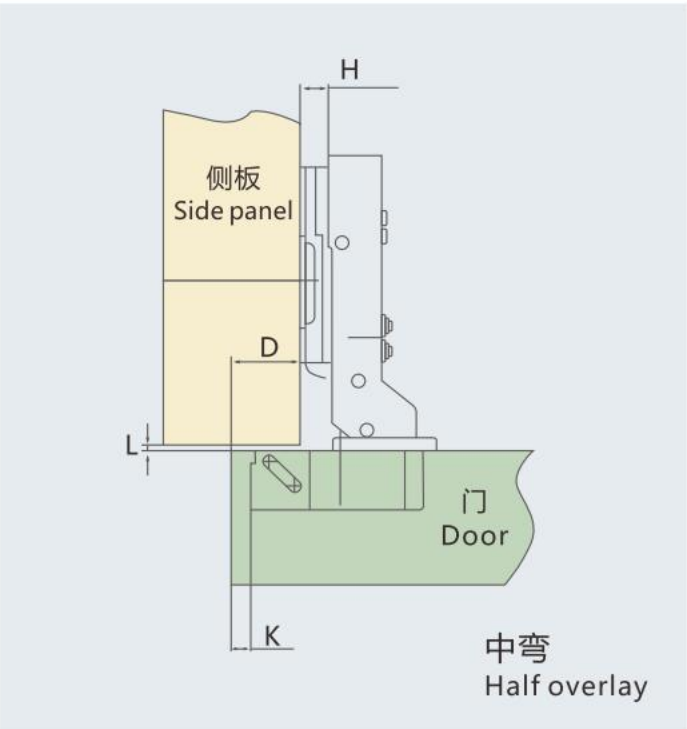


$H = 4 + K - D$

| D \ K | 3 | 4  | 5  | 6  | 7  |
|-------|---|----|----|----|----|
| -2    | 9 | 10 | 11 | 12 | 13 |
| 0     | 7 | 8  | 9  | 10 | 11 |



大弯 订货号 (Item number) : 0243

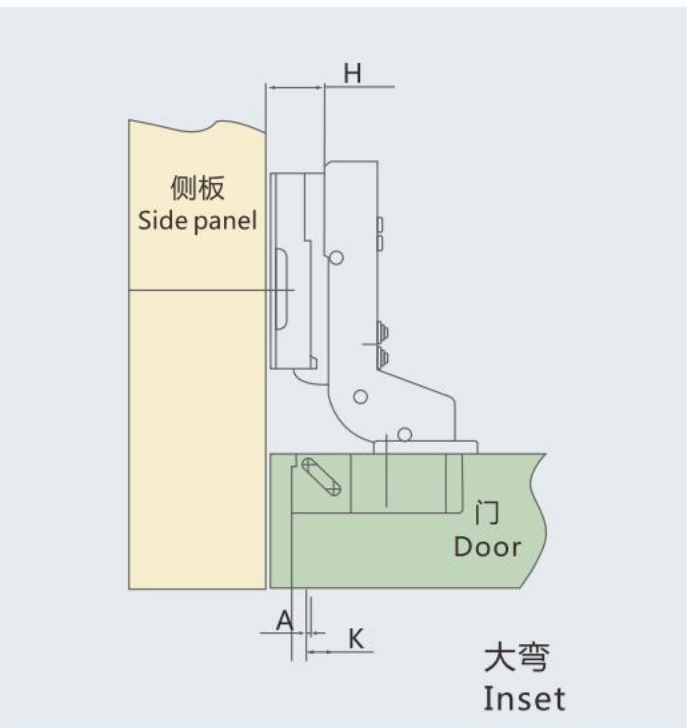

$H = 4 + K + A$

| A \ K | 3 | 4 | 5  | 6  | 7  |
|-------|---|---|----|----|----|
| 0     | 1 | 0 | -1 | -2 | -3 |

备注：有H=0/2固定四孔底座  
有H=-2/0/2固定两孔底座