欧式三节隐藏式缓冲滑轨带调节钉

European style full extension soft closing under mount slide with adjustment screws



基本参数 Basic Parameter

产品材质:镀锌板

材料厚度: 1.8×1.5×1.0 mm

额定负重: 35KGS/18" 标准长度

使用寿命:超过50000次,通过SGS疲劳测试

尺寸范围: 12"-22", 也可根据要求定制 安装方式:调节钉连接(可带插销),无需前置连接件

调节钉调节幅度: 4.5mm(上下调节)

产品特点:全新优化设计,配备高精度的生产线和检测仪器 静音系统保证滑动导轨推拉轻松,顺畅无噪声

Product material: Galvanized sheet

Material thickness: 1.8x1.5x1.0 mm Load rating: 35KGS / 18" as standard

Cycling: over 50,000 times, pass the SGS fatigue test

Size range: 12" - 22", customized is available

Installation: Connect with adjustment screws or plastic plug, don't need front connector

The adjustment screws adjusting range: 4.5mm (up and down)

Product feature: Innovative new designed, produced by high accuracy production line and strict measuring,

silent system guarantees smooth run without noise.



Adjustment screws


金属阻尼管 Metal damping tube

| 产品编号 Item No | 滑轨长度 Slide Length | 抽屉长度(L1) Drawer Length | 最小柜深(L) Min Cabinet Depth | 安装孔(L2) Assembling hole | 包装单位(套/箱) Packing Unit (set/box) |
|-----------------|----------------------|---------------------------|------------------------------|----------------------------|---------------------------------------|
| EUR33A-12"/300 | 308mm | 300mm | 322mm | 256mm | 10 |
| EUR33A-14"/350 | 358mm | 350mm | 372mm | 306mm | 10 |
| EUR33A-16"/400 | 408mm | 400mm | 422mm | 356mm | 10 |
| EUR33A-18"/450 | 458mm | 450mm | 472mm | 406mm | 10 |
| EUR33A-20"/500 | 508mm | 500mm | 522mm | 456mm | 10 |
| EUR33A-22"/550 | 558mm | 550mm | 572mm | 506mm | 10 |

Installation- 安装详情


柜体内的空间需求

Dcabinet Inside Space




抽屉尺寸及打孔图

Drawer Size And Drilling Diagram




安装孔位图


Hole Pattern For Installation

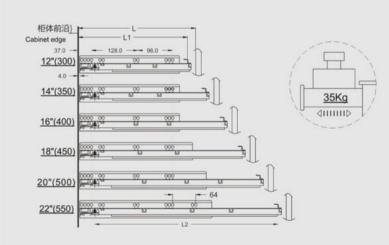

外置抽屉 Standard drawer



将左右滑动轨安装在柜子两侧 Assemble the left and right slide on both sides of cabinet



将抽屉推入,缓冲关闭} Push the drawer drawer damping closed



将抽屉放在滑动轨上,调节螺丝钉插入抽屉孔内, 与然后推入柜体,安装完成

