

美式三节隐藏式缓冲滑轨（带销钉、尾托）
American style full extension soft closing undermount slide (with front connectors and back connectors)

US33A



可选配件 Optional Accessories



塑料尾托
Plastic back connector



金属尾托
Metal back connector

产品特点 Product features



调节螺丝
Adjustment screws



金属阻尼管
Metal damping tube

基本参数 Basic Parameter

产品材质: 镀锌板
材料厚度: 1.8x1.5x1.0 mm
额定负重: 35KGS / 18" 标准长度
使用寿命: 超过50000次, 通过SGS疲劳测试
尺寸范围: 12" - 21", 也可根据要求定制
安装方式: 销钉调节 (可带插销), 无需前置连接件
调节钉调节幅度: 4.5mm (上下调节)
产品特点: 全新优化设计, 配备高精度的生产线和检测仪器
静音系统保证滑动导轨推拉轻松, 顺畅无噪声


Product material: Galvanized sheet
Material thickness: 1.8x1.5x1.0 mm
Load rating: 35KGS / 18" as standard
Cycling: over 50,000 times, pass the SGS fatigue test
Size range: 12" - 21", customized is available
Installation: Connect with adjustment screws and plastic plug ,
no more front connectors.
The adjustment screws adjusting range: 4.5mm (up and down)
Product feature: Innovative new designed , produced by high
accuracy production line and strict measuring.
Silent system guarantees smooth run without noise.

产品规格 Product specifications


产品编号 Item No.	滑轨长度 Slide Length	抽屉长度 (L1) Drawer Length	安装孔 Installation Hole	最小柜深 (L) Min Cabinet Depth	包装单位 (套) / 箱 Packing Unit (set)/Box
US33A-18"/457	470mm	457mm	343mm	493mm	10
US33A-21"/533	546mm	533mm	381mm	569mm	10

Installation- 安装详情



柜体内的空间需求
Dcabinet Inside Space

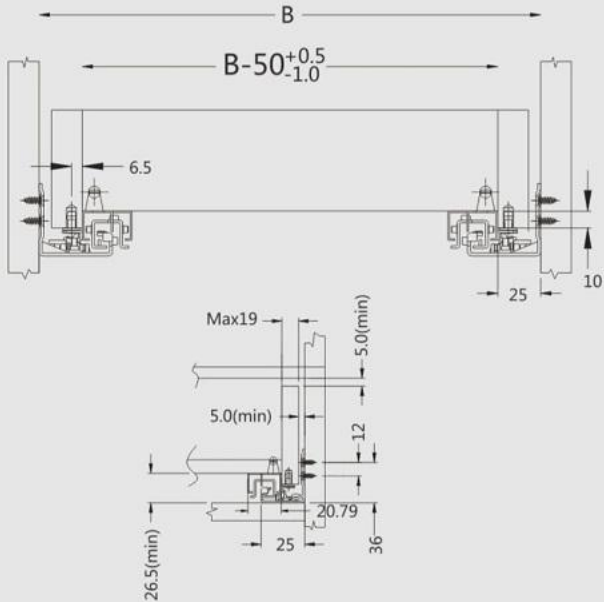


抽屉尺寸及打孔图
Drawer Size And Drilling Diagram

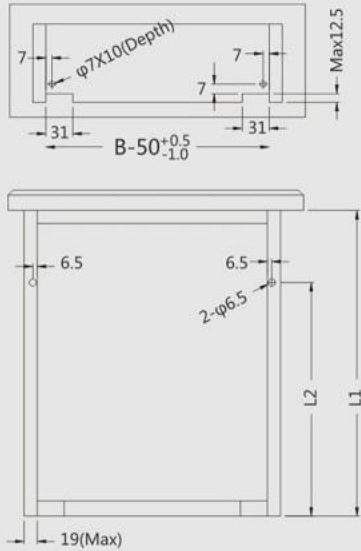


安装孔位图
Hole Pattern For Installation

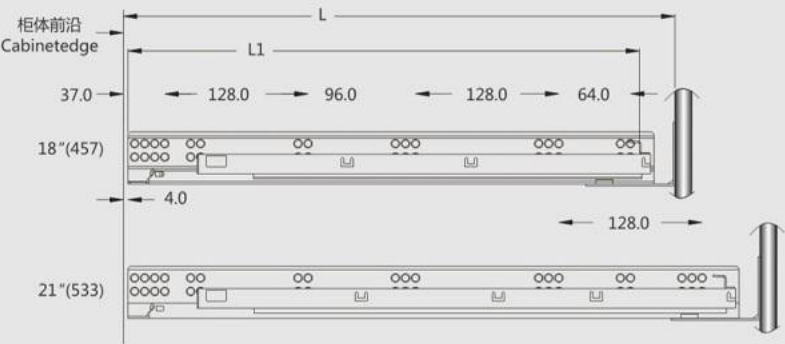

将左右滑动轨安装在柜子两侧)
Assemble the left and right slide on bothsides of cabinet

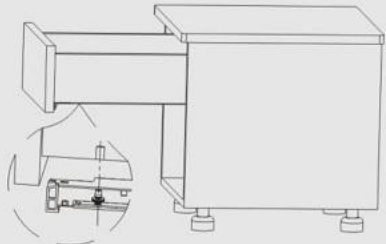

将抽屉放在滑动轨上, 调节螺丝钉插入抽屉孔内,
然后推入柜体, 安装完成
The drawer on the slide, regulating screw into the drawer hole,
and then into the cabinet,the installation is complete



将抽屉推入, 缓冲关闭
Push the drawer drawer damping closed