


美式三节隐藏式缓冲滑轨带(前置连接件、尾托)
American style full extension soft closing undermount slide (with front connectors and back connectors)

US33B



可选配件 Optional Accessories

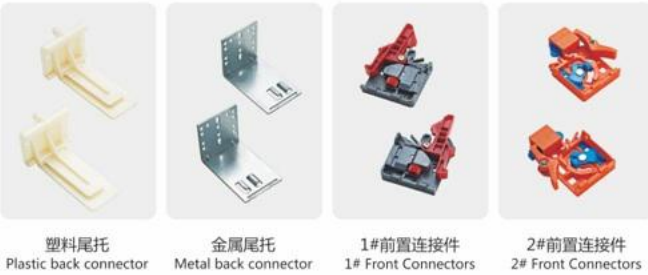

产品特点 Product features



产品规格 Product specifications

产品编号 Item No.	滑轨长度 Slide Length	抽屉长度 (L1) Drawer Length	拉出长度 Pull-out Length	最小柜深 (L) Min Cabinet Depth	包装单位 (套) / 箱 Packing Unit (set)/Box
US33B-12"/305	318mm	305mm	286mm	341mm ±8	10
US33B-15"/381	394mm	381mm	360mm	417mm ±8	10
US33B-18"/457	470mm	457mm	405mm	493mm ±8	10
US33B-21"/533	546mm	533mm	510mm	569mm ±8	10


基本参数 Basic Parameter

产品材质: 镀锌板
材料厚度: 1.8x1.5x1.0 mm
额定负重: 35KGS / 18" 标准长度
使用寿命: 超过50000次, 通过SGS疲劳测试
尺寸范围: 12" - 21", 也可根据要求定制
安装方式: 前置连接件连接
连接件调节幅度: 2.5mm (上下调节)
产品特点: 全新优化设计, 配备高精度的生产线和检测仪器
静音系统保证滑动导轨推拉轻松, 顺畅无噪声


Product material: Galvanized sheet
Material thickness: 1.8x1.5x1.0 mm
Load rating: 35KGS / 18" as standard
Cycling: over 50,000 times, pass the SGS fatigue test
Size range: 12" - 21" ,customized is available
Installation: Connect with front connector
The front connectors adjusting range: 2.5mm (up and down)
Product feature: Innovative new designed , produced by high accuracy production line and strict measuring.
Silent system guarantees smooth run without noise.

Installation- 安装详情

柜体内的空间需求
Dcabinet Inside Space

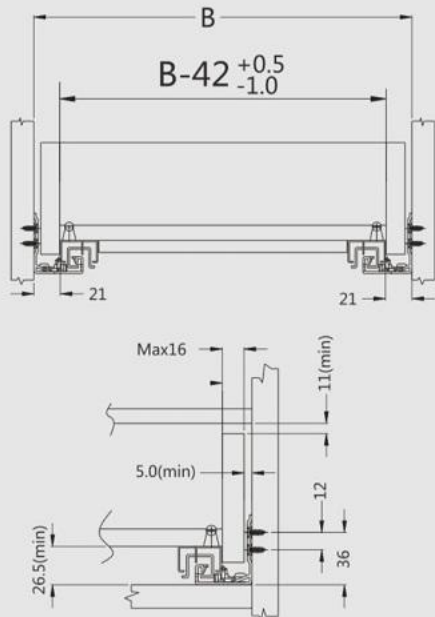

抽屉尺寸及打孔图
Drawer Size And Drilling Diagram

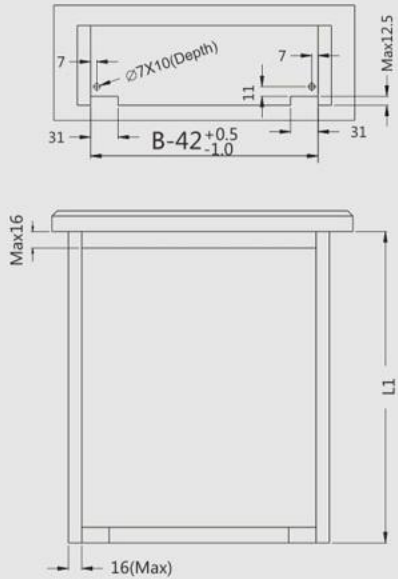

安装孔位图
Hole Pattern For Installation

